

ARDRA ALU WALL -en- LED PROFILE Ø 019

INDOOR LED PROFILE

APPLICATIONS:

- Asymmetrically beam lighting
- Floor LED lighting (halls / restaurants / hotels / hospitals)
- Interior design projects

DESCRIPTION:

Material: Natural anodised aluminum with transparent or opaline diffuser, resistant to UV rays and shocks.


Dimensions: 70 mm in height and 26,2 mm in width. Minimum length 30cm, maximum 200cm (other sizes on request).



IP40



DATA SHEET

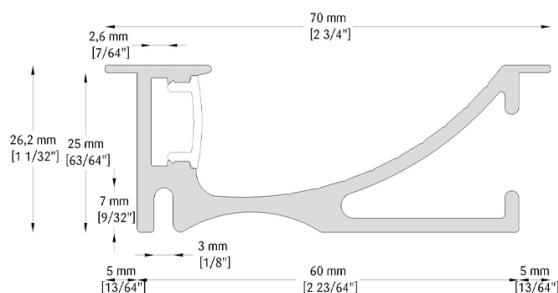

CHARACTERISTICS

LED module: mid-power LEDs on metal core PCB

PCB LED 11W

| W/mt | K | lm/mt | LED/mt - Type - V | CRI |
|------|------|-------|----------------------|-----|
| 11 | 2700 | 1440 | 168 - SMD 2835 - 24V | >85 |
| 11 | 3000 | 1520 | 168 - SMD 2835 - 24V | >85 |
| 11 | 4000 | 1600 | 168 - SMD 2835 - 24V | >85 |

PCB LED 22W

| W/mt | K | lm/mt | LED/mt - Type - V | CRI |
|------|------|-------|----------------------|-----|
| 22 | 2700 | 2970 | 168 - SMD 2835 - 24V | >85 |
| 22 | 3000 | 3124 | 168 - SMD 2835 - 24V | >85 |
| 22 | 4000 | 3300 | 168 - SMD 2835 - 24V | >85 |

ARDRA ALU WALL -en- LED PROFILE Ø 19

STRIP LED 19W DYNAMIC WHITE

| W/mt | K | lm/mt | LED/mt - Type - V | CRI |
|------|---------------------|-----------|------------------------|-----|
| 19 | 2700-3200+6000-6500 | 1120+1232 | 56+56 - SMD 2835 - 24V | >80 |

STRIP LED RGB+W

| W/mt | K (White) | lm/mt (White) | LED/mt - Type - V | CRI (White) |
|------|------------------|---------------|---------------------|-------------|
| 20 | RGB+WW 2800-3000 | 504 | 84 - SMD 5050 - 24V | WW>80 |
| 20 | RGB+NW 3800-4000 | 588 | 84 - SMD 5050 - 24V | NW>80 |
| 20 | RGB+CW 6000-6500 | 672 | 84 - SMD 5050 - 24V | CW>80 |

NOTES AND ACCESSORIES

- Controller for RGB management and light dimmer dimming.
- Standard cable length 1500mm, other sizes on request.
- Power supplies not included, to be ordered separately.

Last update: 11 October 2018