

AMBRA EST.L -en- RECESSED LUMINAIRES Ø 103

Adjustable, extractable recessed downlight. Die-cast aluminium body, metallized polycarbonate reflector. Body and ring white color + glossy chrome reflector. Interchangeable reflectors to obtain different shades of light.

20/40/55 ° beam. Diameter of 190mm, hole of 180mm, height 140,5mm. Led from 17w to 33w. Availability of LED CRI> 90 and fashion and art LED with CRI> 98. Ugr <19.




IP20

RG1



DATA SHEET

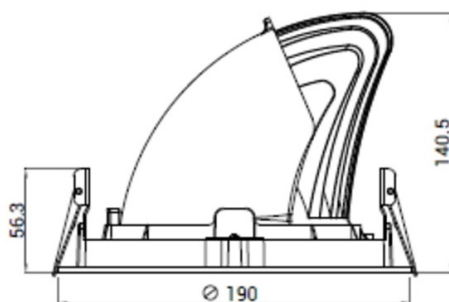

CHARACTERISTICS

LED modules: Latest generation COB Led. Other configurations available on request.

CRI 98 A+ ART

W	K	lm	mA	CRI
17	3000	1820	500	98
25	3000	2480	700	98
33	3000	3095	900	98

AMBRA EST.L -en- RECESSED LUMINAIRES O 103

CRI >90 A+ FASHION

W	K	lm	mA	CRI
17	3250	1925	500	>90
25	3250	2620	700	>90
33	3250	3275	900	>90

CRI >90 A+

W	K	lm	mA	CRI
17	2700	1820	500	>90
17	3000	1910	500	>90
17	4000	2010	500	>90
24	2700	2440	700	>90
24	3000	2575	700	>90
24	4000	2700	700	>90
32	2700	3010	900	>90
32	3000	3165	900	>90
32	4000	3325	900	>90

CRI >80 A++

W	K	lm	mA	CRI
17	2700	2125	500	>80
17	3000	2235	500	>80
17	4000	2340	500	>80
24	2700	2855	700	>80
24	3000	3000	700	>80
24	4000	3150	700	>80
32	2700	3515	900	>80
32	3000	3695	900	>80
32	4000	3880	900	>80

AMBRA EST.L -en- RECESSED LUMINAIRES O 103

NOTES AND ACCESSORIES

Honeycomb grid.
Compensation ring.
Box for concrete.
Emergency kit SA: 1 hour @350mA.
20°, 40°, 55° beam.
Availability of standard, dimmable, Dali dimmable and CASAMBI Dali driver.
Luminaires not suitable for covering with thermally insulating material.

Last update: 31 October 2018