

AMETISTA ROUND -en- RECESSED LUMINAIRES Ø 170

Adjustable recessed downlight, with a diameter of 170mm. Aluminium painted body with steel clips. Diffuser with 12/24/38 ° polycarbonate lens. Led from 12w up to 33w. Cob leds with cri > 90 designed for the fashion market and for art exhibitions are available too.




IP20

RG1



DATA SHEET

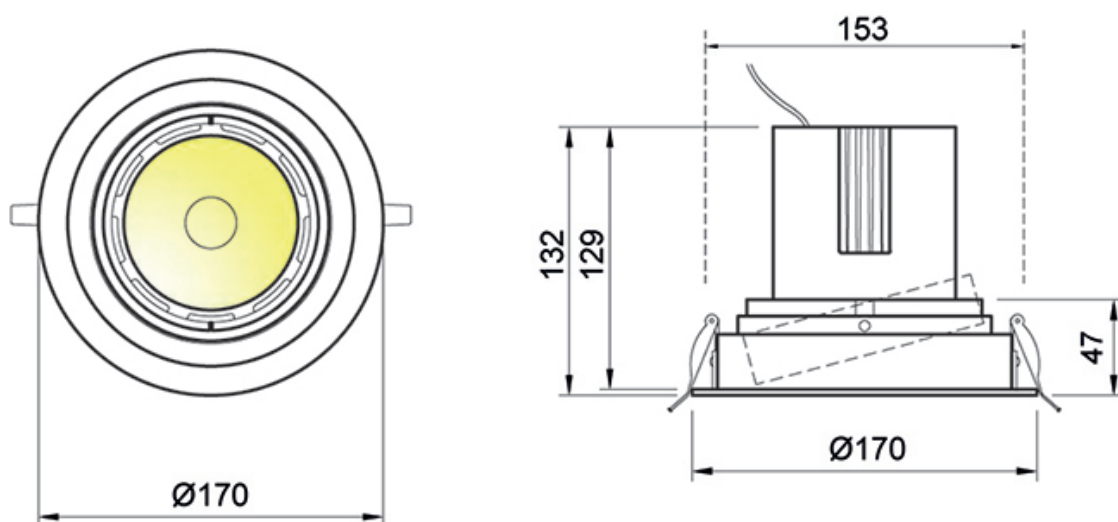

CHARACTERISTICS

LED modules: Latest generation COB Led. Other configurations available on request.

CRI >90 A+ ART

W	K	lm	mA	CRI
12	3000	1305	350	98
17	3000	1820	500	98
25	3000	2475	700	98
33	3000	3100	900	98

AMETISTA ROUND -en- RECESSED LUMINAIRES o o77

CRI >90 A+ FASHION

W	K	lm	mA	CRI
12	3250	1380	350	>90
17	3250	1925	500	>90
25	3250	2620	700	>90
33	3250	3280	900	>90

CRI >90 A+

W	K	lm	mA	CRI
12	2700	1465	350	>90
12	3000	1500	350	>90
12	4000	1605	350	>90
17	2700	2045	500	>90
17	3000	2095	500	>90
17	4000	2240	500	>90
25	2700	2775	700	>90
25	3000	2845	700	>90
25	4000	3050	700	>90
33	2700	3480	900	>90
33	3000	3565	900	>90
33	4000	3820	900	>90

AMETISTA ROUND -en- RECESSED LUMINAIRES o o77

CRI >80 A++

W	K	lm	mA	CRI
12	2700	1730	350	>80
12	3000	1775	350	>80
12	4000	1845	350	>80
17	2700	2410	500	>80
17	3000	2470	500	>80
17	4000	2575	500	>80
25	2700	3275	700	>80
25	3000	3360	700	>80
25	4000	3500	700	>80
33	2700	4100	900	>80
33	3000	4210	900	>80
33	4000	4390	900	>80

NOTES AND ACCESSORIES

Emergency kit SA: 1 hour @350mA.

Beam with 12°, 24° or 38° lens.

Availability of standard, dimmable, Dali dimmable or Dali CASAMBI driver.

Luminaires not suitable for covering with thermally insulating material.

Last update: 25 October 2018