

AZUL L -en- RECESSED LUMINAIRES Ø 165

Adjustable recessed downlight, with a diameter of 165mm.
Die-cast aluminium body, diffuser with 20/35/50 ° lens in polycarbonate.
White, black and brushed nickel finishes are available. Led from 12w up to 18w.




IP44

RG1



DATA SHEET

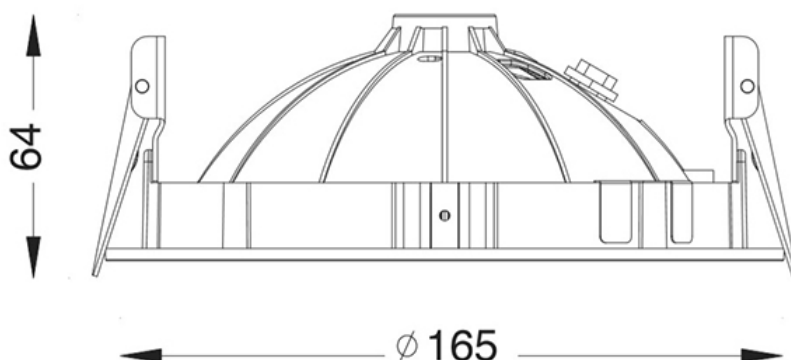

CHARACTERISTICS

LED modules: Latest generation COB Led. Other configurations available on request.

CRI >80 A++

W	K	lm	mA	CRI
14	2700	1590	400	>80
14	3000	1670	400	>80
14	4000	1760	400	>80

AZUL L -en- RECESSED LUMINAIRES Ø 76

CRI >90 A+

W	K	lm	mA	CRI
14	2700	1360	400	>90
14	3000	1425	400	>90
14	4000	1505	400	>90

NOTES AND ACCESSORIES

Emergency kit SA: 1 hour @350mA.

Beam with 20°, 35° or 50° lens.

Availability of standard, dimmable, Dali dimmable or Dali CASAMBI driver.

Luminaires not suitable for covering with thermally insulating material.

Last update: 25 October 2018