


AZUL M -en- RECESSED LUMINAIRES Ø 118



Adjustable recessed downlight, with a diameter of 118mm.
Die-cast aluminium body, diffuser with 24/40/50 ° lens in polycarbonate.
White, black and brushed nickel finishes are available. Led 9w

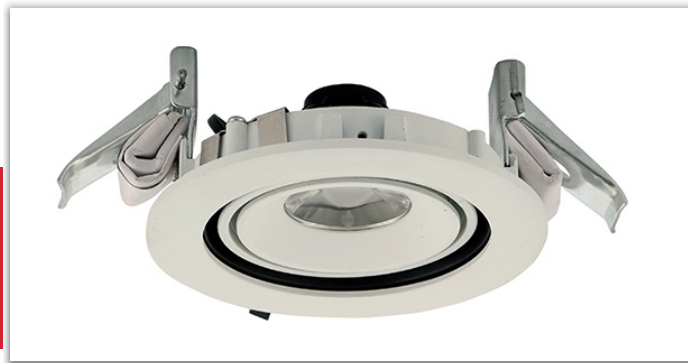


IP44

RG1



DATA SHEET

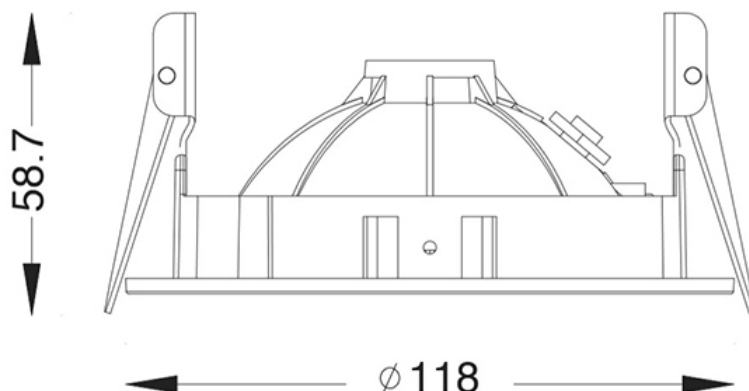

CHARACTERISTICS

LED modules: Latest generation COB Led. Other configurations available on request.

CRI >80 A++

W	K	lm	mA	CRI
9	3000	900	200	>80

NOTES AND ACCESSORIES

Emergency kit SA: 1 hour @350mA.
Beam with 24°, 40° or 50° lens.
Standard driver included.
Luminaires not suitable for covering with thermally insulating material.

Last update: 25 October 2018