

BLENDA 1 SQUARE -en- RECESSED LUMINAIRES Ø 68

Fixed Downlight, die-cast aluminium body painted white, polycarbonate lens diffuser and steel clips. Dimensions 95x95mm and ring with white finish. 20/40/60° beam and waterproof IP65. Led 14w




IP65

RG1



DATA SHEET

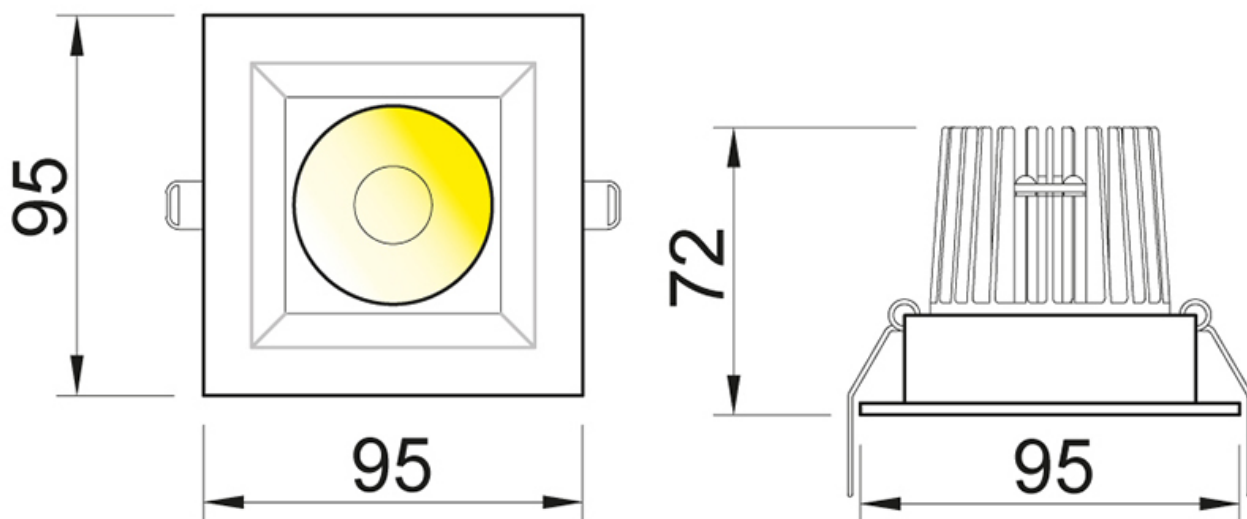

CHARACTERISTICS

LED modules: Latest generation COB Led. Other configurations available on request.

CRI >80 A++

W	K	lm	mA	CRI
14	3000	990	350	>80
14	4000	1080	350	>80

NOTES AND ACCESSORIES

Waterproof

Emergency kit SA: 1 hour @350mA.

20°, 40°, 60° beam.

Availability of standard, dimmable, Dali dimmable and CASAMBI Dali driver.

Luminaires not suitable for covering with thermally insulating material.

Last update: 18 October 2018