



DIORITE 105 -en- RECESSED LUMINAIRES Ø 105

Fixed Downlight with an 105mm diameter. Generous heatsink and polycarbonate lens diffuser. Body and ring white colour + glossy chrome reflector. Interchangeable reflectors, possibility to choose among the nine different available colours. Ugr <19. 20/40/55° beam. Cob leds with cri > 90 designed for the fashion market and for art exhibitions are available too. Power from 12w to 21w

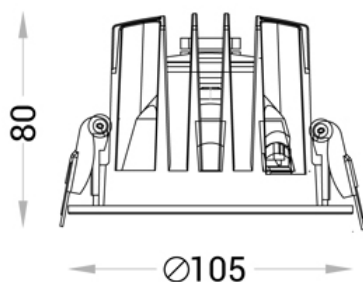

DATA SHEET



CHARACTERISTICS

LED modules: Latest generation COB Led. Other configurations available on request.

CRI 98 A+ ART

W	K	lm	mA	CRI
12	3000	1305	350	98
17	3000	1820	500	98
21	3000	2150	600	98

DIORITE 105 -en- RECESSED LUMINAIRES O O55

CRI >90 A+ FASHION

W	K	lm	mA	CRI
12	3250	1380	350	>90
17	3250	1925	500	>90
21	3250	2280	600	>90

CRI >90 A+

W	K	lm	mA	CRI
12	2700	1315	350	>90
12	3000	1380	350	>90
12	4000	1450	350	>90
17	2700	1820	500	>90
17	3000	1915	500	>90
17	4000	2015	500	>90
21	2700	2140	600	>90
21	3000	2250	600	>90
21	4000	2365	600	>90

CRI >80 A++

W	K	lm	mA	CRI
12	2700	1535	350	>80
12	3000	1610	350	>80
12	4000	1690	350	>80
17	2700	2125	500	>80
17	3000	2230	500	>80
17	4000	2340	500	>80
21	2700	2500	600	>80
21	3000	2625	600	>80
21	4000	2755	600	>80

DIORITE 105 -en- RECESSED LUMINAIRES O O55

NOTES AND ACCESSORIES

Honeycomb grid.
Compensation ring.
Box for concrete.
Emergency kit SA: 1 hour @350mA.
20°, 40°, 55° beam.
Availability of standard, dimmable, Dali dimmable and CASAMBI Dali driver.
Luminaires not suitable for covering with thermally insulating material.

Last update: 18 October 2018