

DIORITE SQUARE 105 -en- RECESSED LUMINAIRES Ø 105

Recessed downlight. Die-cast aluminium body, polycarbonate lens diffuser. Body and ring white color + glossy chrome reflector. Interchangeable reflectors to obtain different shades of light. 20/40/55 ° beam. Dimensions 105x105mm, hole 95x95mm, height 63mm. Led from 12w to 21w. Availability of LED CRI> 90 and fashion and art LED with CRI>98. Ugr <19. Accessories: honeycomb grid and compensation frame.




IP20

RG1



DATA SHEET

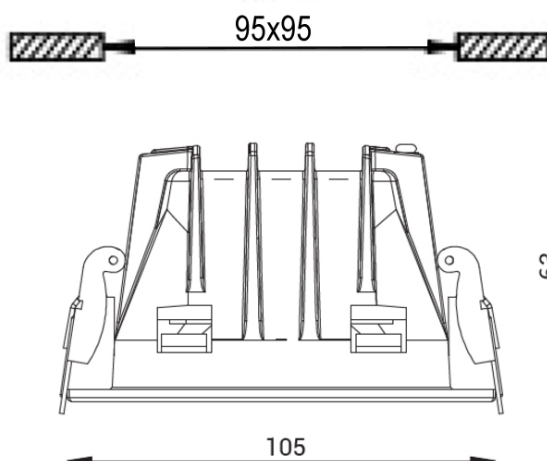

CHARACTERISTICS

LED modules: Latest generation COB Led. Other configurations available on request.

CRI 98 A+ ART

W	K	lm	mA	CRI
12	3000	1305	350	98
17	3000	1820	500	98
21	3000	2150	600	98

DIORITE SQUARE 105 -en- RECESSED LUMINAIRES o 105

CRI >90 A+ FASHION

W	K	lm	mA	CRI
12	3250	1380	350	>90
17	3250	1925	500	>90
21	3250	2280	600	>90

CRI >90 A+

W	K	lm	mA	CRI
12	2700	1315	350	>90
12	3000	1380	350	>90
12	4000	1450	350	>90
17	2700	1820	500	>90
17	3000	1915	500	>90
17	4000	2015	500	>90
21	2700	2140	600	>90
21	3000	2250	600	>90
21	4000	2365	600	>90

CRI >80 A++

W	K	lm	mA	CRI
12	2700	1535	350	>80
12	3000	1610	350	>80
12	4000	1690	350	>80
17	2700	2125	500	>80
17	3000	2230	500	>80
17	4000	2340	500	>80
21	2700	2500	600	>80
21	3000	2625	600	>80
21	4000	2755	600	>80

DIORITE SQUARE 105 -en- RECESSED LUMINAIRES o 105

NOTES AND ACCESSORIES

Honeycomb grid.
Compensation frame.
Emergency kit Sa. 1x350 mA
20°, 40° or 55° beam.
Availability of standard, dimmable, Dali dimmable and CASAMBI Dali driver.
Luminaires not suitable for covering with thermally insulating material.

Last update: 18 October 2018