


STAR 48 -en- LIGHTING SYSTEMS Ø 140

LED modules with a very low voltage and magnetic adapter. Aluminum extruded body, controlled optical diffusers, ugr <19. 30 ° beam. Available color: black. CRI > 90. Standard or Dali dimmable driver. Available lengths: 286, 567, 847, 1128 mm. The whole Star family can be supplied in the polycarbonate opal diffuser version.



DATA SHEET

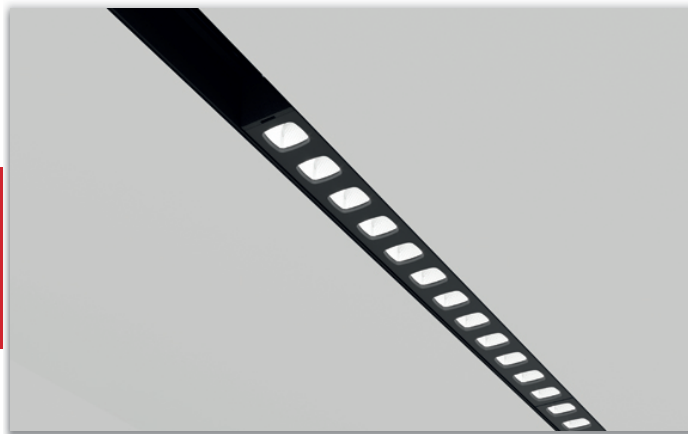

CHARACTERISTICS

LED modules: Latest generation Led COB. Other configurations available on request.

CRI >90 286mm

| W | K | lm | CRI |
|---|------|-----|-----|
| 6 | 3000 | 525 | 90 |
| 6 | 4000 | 560 | 90 |

CRI >90 567mm

| W | K | lm | CRI |
|----|------|------|-----|
| 11 | 3000 | 1045 | 90 |
| 11 | 4000 | 1120 | 90 |

STAR 48 -en- LIGHTING SYSTEMS Ø 140

CRI >90 847mm

| W | K | lm | CRI |
|----|------|------|-----|
| 16 | 3000 | 1565 | 90 |
| 16 | 4000 | 1865 | 90 |

CRI >90 1128mm

| W | K | lm | CRI |
|----|------|------|-----|
| 19 | 3000 | 1880 | 90 |
| 19 | 4000 | 2015 | 90 |

NOTES AND ACCESSORIES

Available lengths: 286, 567, 847, 1128 mm
30° beam.
Standard or Dali dimmerabile driver.

Last update: 4 October 2018