


ARDRA POWER WIDE 80 - e LED PROFILE Ø 113

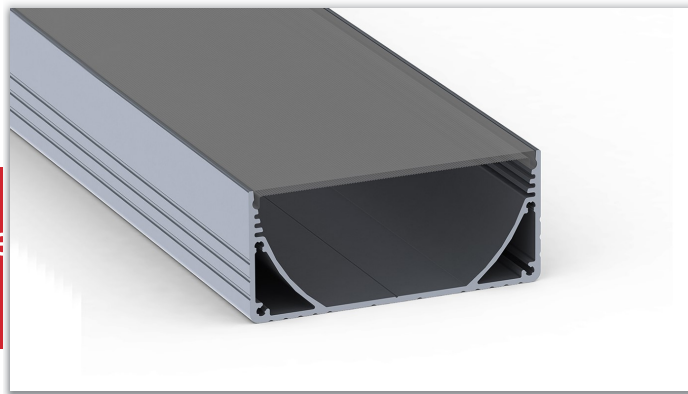

INDOOR LED PROFILE

APPLICATIONS:

- Independent wall lamp, ceiling or hanging
- Overhead lighting (retail / offices / restaurants / hotels / hospitals / houses)
- Linear decorative lighting (halls / subway)
- Interior design projects

DESCRIPTION:

Material: Natural anodised aluminum with transparent or opaline diffuser, resistant to UV rays and shocks.


Dimensions: 35 mm in height and 80 mm in width. Minimum length 30cm, maximum 300cm (other sizes on request)



IP40



DATA SHEET

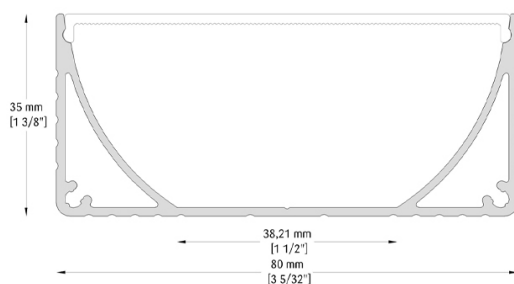

CHARACTERISTICS

LED module: mid-power LEDs on metal core PCB

PCB LED 22W

W/mt	K	lm/mt	LED/mt - Type - V	CRI
22	2700	2970	168 - SMD 2835 - 24V	>85
22	3000	3124	168 - SMD 2835 - 24V	>85
22	4000	3300	168 - SMD 2835 - 24V	>85

PCB LED 30W

W/mt	K	lm/mt	LED/mt - Type - V	CRI
30	2700	3780	100 - SMD 2835 - 24V	>80
30	3000	3990	100 - SMD 2835 - 24V	>80
30	4000	4200	100 - SMD 2835 - 24V	>80

ARDRA POWER WIDE 80 -en- LED PROFILE Ø 113

STRIP LED 19W DYNAMIC WHITE

W/mt	K	lm/mt	LED/mt - Type - V	CRI
19	2700-3200+6000-6500	1120+1232	56+56 - SMD 2835 - 24V	>80

NOTES AND ACCESSORIES

- Standard cable length 1500mm, other sizes on request.
- Power supplies not included, to be ordered separately.

Last update: 11 October 2018