

DIORITE 125 -en- RECESSED LUMINAIRES Ø 125

Fixed Downlight with an 125mm diameter. Generous heatsink and polycarbonate lens diffuser. Body and ring white colour + glossy chrome reflector. Interchangeable reflectors, possibility to choose among the nine different available colours. Ugr <19. 20/40/55° beam. Cob leds with cri> 90 designed for the fashion market and for art exhibitions are available too. Power from 12w to 24w





IP20

RG1



DATA SHEET

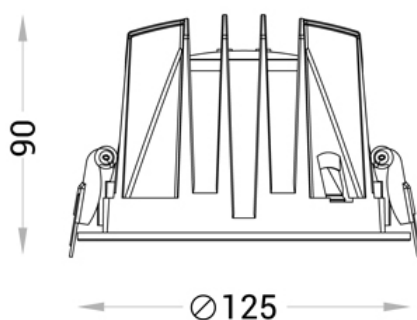

CHARACTERISTICS

LED modules: Latest generation COB Led. Other configurations available on request.

CRI 98 A+ ART

W	K	lm	mA	CRI
12	3000	1305	350	98
17	3000	1820	500	98
25	3000	2475	700	98

DIORITE 125 -en- RECESSED LUMINAIRES O O56

CRI >90 A+ FASHION

W	K	lm	mA	CRI
12	3250	1380	350	>90
17	3250	1925	500	>90
25	3250	2620	700	>90

CRI >90 A+

W	K	lm	mA	CRI
12	2700	1315	350	>90
12	3000	1380	350	>90
12	4000	1450	350	>90
17	2700	1820	500	>90
17	3000	1915	500	>90
17	4000	2225	500	>90
24	2700	2440	700	>90
24	3000	2575	700	>90
24	4000	2700	700	>90

CRI >80 A++

W	K	lm	mA	CRI
12	2700	1535	350	>80
12	3000	1610	350	>80
12	4000	1690	350	>80
17	2700	2125	500	>80
17	3000	2230	500	>80
17	4000	2340	500	>80
24	2700	2855	700	>80
24	3000	3000	700	>80
24	4000	3150	700	>80

DIORITE 125 -en- RECESSED LUMINAIRES ○ ○56

NOTES AND ACCESSORIES

Honeycomb grid.
Compensation ring.
Box for concrete.
Emergency kit SA: 1 hour @350mA.
20°, 40°, 55° beam.
Availability of standard, dimmable, Dali dimmable and CASAMBI Dali driver.
Luminaires not suitable for covering with thermally insulating material.

Last update: 15 November 2018