

## DIORITE SQUARE 125 -en- RECESSED LUMINAIRES Ø 106

Recessed downlight. Die-cast aluminium body, polycarbonate lens diffuser. Body and ring white color + glossy chrome reflector. Interchangeable reflectors to obtain different shades of light. 20/40/55 ° beam. Dimensions 125x125mm, hole 115x115mm, height 72mm. Led from 12w to 25w. Availability of LED CRI> 90 and fashion and art LED with CRI>98. Ugr <19. Accessories: honeycomb grid and compensation frame.




IP20

RG1



### DATA SHEET

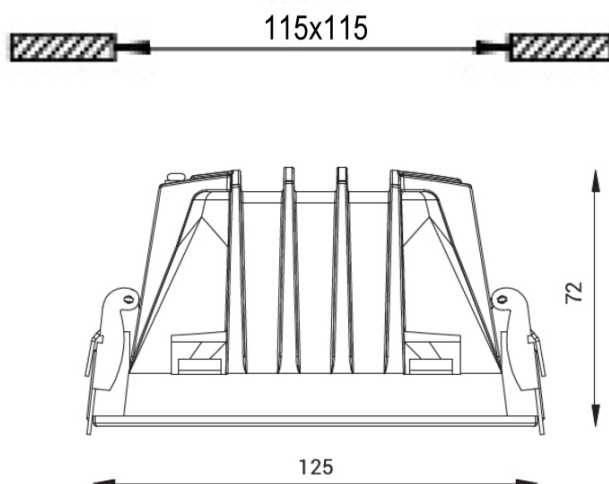

### CHARACTERISTICS

LED modules: Latest generation COB Led. Other configurations available on request.

#### CRI 98 A+ ART

| W  | K    | lm   | mA  | CRI |
|----|------|------|-----|-----|
| 12 | 3000 | 1305 | 350 | 98  |
| 17 | 3000 | 1820 | 500 | 98  |
| 25 | 3000 | 2475 | 700 | 98  |

## DIORITE SQUARE 125 -en- RECESSED LUMINAIRES o 106

### CRI >90 A+ FASHION

| W  | K    | lm   | mA  | CRI |
|----|------|------|-----|-----|
| 12 | 3250 | 1380 | 350 | >90 |
| 17 | 3250 | 1925 | 500 | >90 |
| 25 | 3250 | 2620 | 700 | >90 |

### CRI >90 A+

| W  | K    | lm   | mA  | CRI |
|----|------|------|-----|-----|
| 12 | 2700 | 1315 | 350 | >90 |
| 12 | 3000 | 1380 | 350 | >90 |
| 12 | 4000 | 1450 | 350 | >90 |
| 17 | 2700 | 1820 | 500 | >90 |
| 17 | 3000 | 1915 | 500 | >90 |
| 17 | 4000 | 2225 | 500 | >90 |
| 24 | 2700 | 2440 | 700 | >90 |
| 24 | 3000 | 2575 | 700 | >90 |
| 24 | 4000 | 2700 | 700 | >90 |

### CRI >80 A++

| W  | K    | lm   | mA  | CRI |
|----|------|------|-----|-----|
| 12 | 2700 | 1535 | 350 | >80 |
| 12 | 3000 | 1610 | 350 | >80 |
| 12 | 4000 | 1690 | 350 | >80 |
| 17 | 2700 | 2125 | 500 | >80 |
| 17 | 3000 | 2230 | 500 | >80 |
| 17 | 4000 | 2340 | 500 | >80 |
| 24 | 2700 | 2855 | 700 | >80 |
| 24 | 3000 | 3000 | 700 | >80 |
| 24 | 4000 | 3150 | 700 | >80 |

## DIORITE SQUARE 125 -en- RECESSED LUMINAIRES Ø 106

### NOTES AND ACCESSORIES

---

Honeycomb grid.  
Compensation frame.  
Emergency kit Sa. 1x350 mA  
20°, 40° or 55° beam.  
Availability of standard, dimmable, Dali dimmable and CASAMBI Dali driver.  
Luminaires not suitable for covering with thermally insulating material.

Last update: 15 November 2018