

QUASAR 100 -en- WALL & SURFACE LAMPS Ø 073

Wall mounted spotlight designed to furnish locations where adjustable light is required.


Die-cast extruded aluminum body, box aluminum body. Diffuser with 12/24/38 ° polycarbonate lens or 60 ° aluminum reflector.

Cob leds with cri > 90 designed for the fashion market and for art exhibitions are available too. Led from 17w up to 33w.



IP20 RG1 CE

DATA SHEET

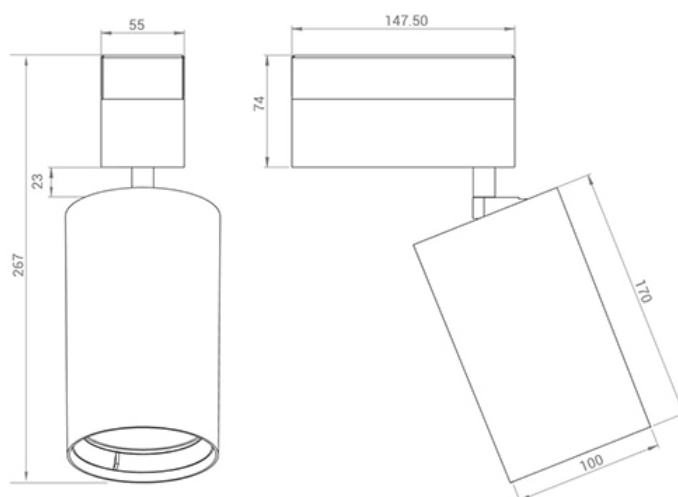

CHARACTERISTICS

LED modules: Latest generation COB Led. Other configurations available on request.

CRI >90 A+ ART

W	K	lm	mA	CRI
17	3000	1820	500	98
25	3000	2480	700	98
29	3000	2790	800	98
33	3000	3100	900	98

QUASAR 100 -en- WALL & SURFACE LAMPS ϕ ϕ 73

CRI >90 A+ FASHION

W	K	lm	mA	CRI
17	3250	1930	500	>90
25	3250	2620	700	>90
29	3250	2950	800	>90
33	3250	3280	900	>90

CRI >90 A+

W	K	lm	mA	CRI
17	2700	2050	500	>90
17	3000	2100	500	>90
17	4000	2240	500	>90
25	2700	2780	700	>90
25	3000	2850	700	>90
25	4000	3050	700	>90
29	2700	3130	800	>90
29	3000	3210	800	>90
29	4000	3440	800	>90
33	2700	3480	900	>90
33	3000	3560	900	>90
33	4000	3820	900	>90

QUASAR 100 -en- WALL & SURFACE LAMPS o o73

CRI >80 A++

W	K	lm	mA	CRI
17	2700	2410	500	>80
17	3000	2470	500	>80
17	4000	2580	500	>80
25	2700	3280	700	>80
25	3000	3360	700	>80
25	4000	3500	700	>80
29	2700	3690	800	>80
29	3000	3790	800	>80
29	4000	3950	800	>80
33	2700	4100	900	>80
33	3000	4210	900	>80
33	4000	4390	900	>80

NOTES AND ACCESSORIES

Opal diffuser.
 Honeycomb grid.
 Emergency kit SA: 1 hour @350mA with remote application.
 Beam with 12°, 24° or 38° lens or with 60° reflector.
 Standard driver included, dimmable and Dali dimmable driver on request.

Last update: 8 November 2018