

ZONDA 120 -en- SUSPENSIONS Ø 120

Suspended luminair. Aluminium body and 99,98 aluminium reflector metalized with safety glass. With a diameter of 120mm and an height of 265mm. 15/30/50° beam. Standard finishes: white, black and grey. Other finishes available on request.
12/17w led.




IP20

RG1



DATA SHEET

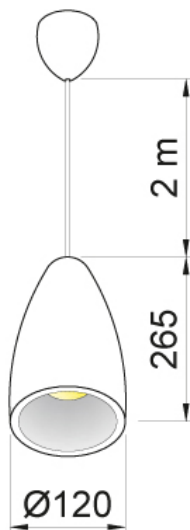

CHARACTERISTICS

LED modules: Latest generation COB Led. Other configurations available on request.

CRI >80 A++

W	K	lm	mA	CRI
12	2700	1730	350	>80
12	3000	1775	350	>80
12	4000	1845	350	>80
17	2700	2410	500	>80
17	3000	2470	500	>80
17	4000	2575	500	>80

ZONDA 120 -en- SUSPENSIONS 0 090

CRI >90 A+

W	K	lm	mA	CRI
12	2700	1465	350	>90
12	3000	1500	350	>90
12	4000	1605	350	>90
17	2700	2045	500	>90
17	3000	2095	500	>90
17	4000	2240	500	>90

CRI >90 A+ FASHION

W	K	lm	mA	CRI
12	3250	1380	350	>90
17	3250	1925	500	>90

CRI >90 A+ ART

W	K	lm	mA	CRI
12	3000	1305	350	98
17	3000	1820	500	98

NOTES AND ACCESSORIES

Opal diffuser.
Mechanical/electrical adapter 6A for track.
Emergency kit Sa. 1x350 mA with remote application.
15/30/50° beam.
Standard driver included, dimmable and Dali dimmable driver on request.

Last update: 3 November 2018