

ZONDA 205 -en- SUSPENSIONS Ø 205

Suspended luminair. Aluminium body and 99,98 aluminium reflector metalized with safety glass. With a diameter of 205mm and an height of 355mm. 20/40/60° beam. Standard finishes: white, black and grey. Other finishes available on request. 25/29w led.




IP20

RG1



DATA SHEET

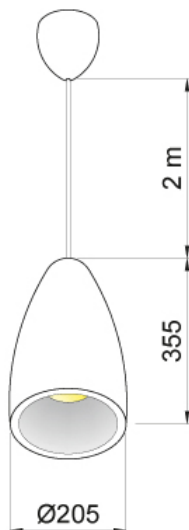

CHARACTERISTICS

LED modules: Latest generation COB Led. Other configurations available on request.

CRI >80 A++

W	K	lm	mA	CRI
25	2700	3280	700	>80
25	3000	3360	700	>80
25	4000	3500	700	>80
29	2700	3690	800	>80
29	3000	3790	800	>80
29	4000	3950	800	>80

ZONDA 205 -en- SUSPENSIONS 0092

CRI >90 A+

W	K	lm	mA	CRI
25	2700	2780	700	>90
25	3000	2850	700	>90
25	4000	3050	700	>90
29	2700	3130	800	>90
29	3000	3210	800	>90
29	4000	3440	800	>90

CRI >90 A+ FASHION

W	K	lm	mA	CRI
25	3250	2620	700	>90
29	3250	2950	800	>90

CRI >90 A+ ART

W	K	lm	mA	CRI
25	3000	2480	700	98
29	3000	2790	800	98

NOTES AND ACCESSORIES

Opal diffuser.
Mechanical/electrical adapter 6A for track.
Emergency kit Sa. 1x350 mA with remote application.
20/40/60° beam.
Standard driver included, dimmable and Dali dimmable driver on request.

Last update: 3 November 2018