


BIN MINI H SUSP. -en- ACCESSORIES ○ 138


H MINI SUSPENSION TRACK

Low voltage tracks, with remote driver. Colours: black, white.
Available a wide range of accessories and 48v drivers. Indirect
light on request.

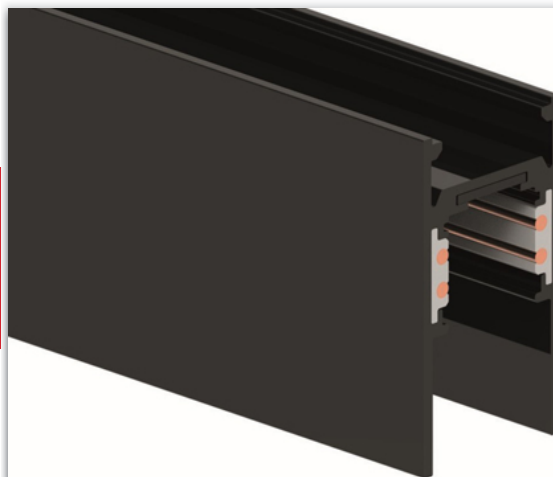

IP20 CE

DATA SHEET

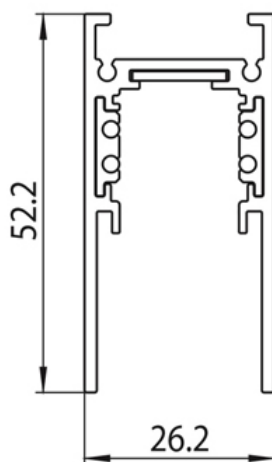

CHARACTERISTICS


Max V	Hz	mt.
48	50	1
48	50	2
48	50	3

NOTES AND ACCESSORIES

In case of track cut, please make sure to reset original copper conductors position, by using a plier.

Last update: 13 November 2018

BIN STD MAX 48V -en- ACCESSORIES ○ 138

	End feed.		Suspension kit with adjustment kit on track, roller, cord grip 2000 mm and stirrup.
	Jointing connector.		Suspension kit with adjustment kit on track, roller, cord grip 5000 mm and stirrup.
	L joint.		End cap.
	Brackets raw aluminium.		End cap with hole for cable.
	Cover for L joint.		