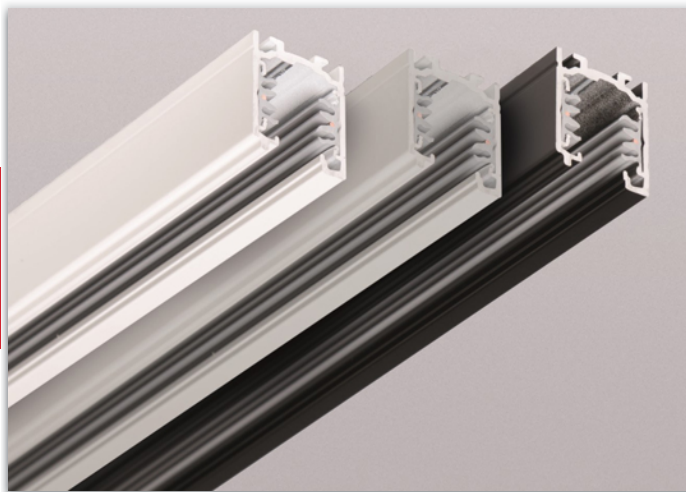


BIN STD/DALI -en- ACCESSORIES o 134

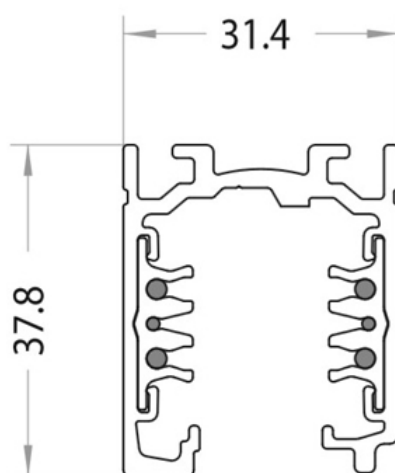
STANDARD/DALI TRACK

Aluminium extruded tracks, 3 phases + DALI. Copper conductors. Voltage 230 / 250v - 16A. Colours: white, black. Available a wide range of accessories.



⊕ IP20 CE

DATA SHEET



CHARACTERISTICS





V	Hz	mA	mt.
230	50	16	1
230	50	16	2
230	50	16	3

NOTES AND ACCESSORIES

In case of track cut, please make sure to reset original copper conductors position, by using a plier.

Last update: 13 November 2018

BIN STD/DALI -en- ACCESSORIES ○ 134

	Mechanical/electrical adapter 6A. Mechanical load 5 kg.		Electrical straight through joint.
	Mechanical/electrical adapter 6A asimmetric. Mechanical load 5 kg.		Mechanical straight insulating joint.
	Mechanical/electrical adapter 6A DALI. Mechanical load 5 kg.		Track cover 1000 mm.
	Mechanical/electrical adapter 6A asimmetric DALI. Mechanical load 5 kg.		Mechanical adapter .
	Right polarity live-end/left earth.		Central connector.
	Left polarity live-end/right earth.		Flexible joint.
	L joint pol. int/earth ext white color.		Dead end.
	L joint pol. ext./earth int white color.		Ceiling kit, only in aluminium.
	X joint.		Suspension kit with steel + adjustable wire lock 2000mm and small canopy.
	T joint pol. ext. left/earth int. right white color.		Suspension kit with steel + adjustable wire lock 5000mm and small canopy.
	T joint pol. ext. right/earth int. left white color.		
	T joint pol. int. left/earth ext. right white color.		
	T joint pol. int. right/earth ext. left white color.		