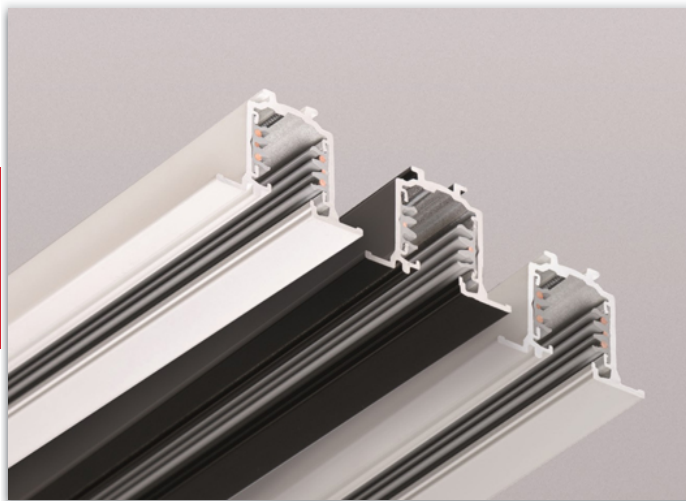


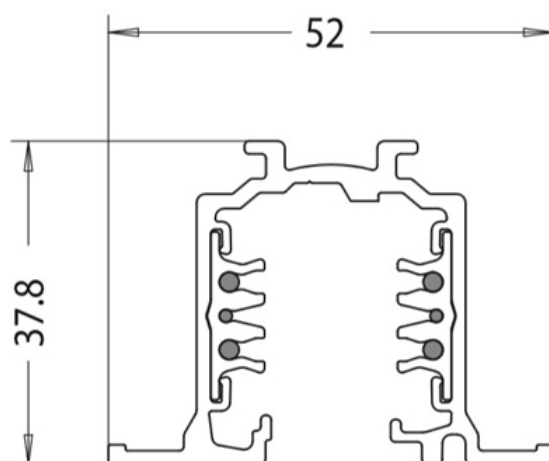
BIN STD/DALI REC. -en- ACCESSORIES Ø 135

STANDARD/DALI RECESSED TRACK

Aluminium extruded tracks, 3 phases + DALI. Copper conductors. Voltage 230 / 250v - 16A. Colours: white, black. Available a wide range of accessories. Plasterboard to be installed.



DATA SHEET



CHARACTERISTICS






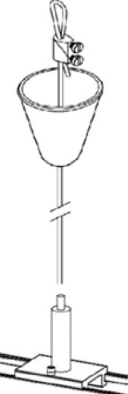




V	Hz	mA	mt.
230	50	16	1
230	50	16	2
230	50	16	3

NOTES AND ACCESSORIES

In case of track cut, please make sure to reset original copper conductors position, by using a plier.

Last update: 13 November 2018

BIN STD/DALI REC. -en- ACCESSORIES ○ 135

	Mechanical/electrical adapter 6A. Mechanical load 5 Kg.		L joint pol. int./earth ext. white color.
	Mechanical/electrical adapter 6A asymmetric. Mechanical load 5 Kg.		L joint pol. ext./earth int. white color.
	Mechanical/electrical adapter 6A DALI. Mechanical load 5 Kg.		Electrical straight through joint.
	Mechanical/electrical adapter 6A asymmetric DALI. Mechanical load 5 Kg.		Mechanical straight insulating joint.
			Track cover 1000 mm.
			Mechanical adapter.
	Right polarity live-end/ left earth.		Central connector.
	Left polarity live-end/ right earth.		Dead end.
	X joint.		Suspension kit with steel + adjustable wire lock 2000mm and small canopy.
	T joint pol. ext. left/earth int. right white color.		
	T joint pol. ext. right/ earth int. left white color.		
	T joint pol. int. left/earth ext. right white color.		
	T joint pol. int. right/ earth ext. left white color.		