


DIORITE 210 -en- RECESSED LUMINAIRES Ø 141


Fixed Downlight with a 210mm diameter and generous heatsink. Die-cast aluminium body, metalized polycarbonate reflector. Body and ring white colour + glossy chrome reflector. Interchangeable reflectors, possibility to choose among the nine different available colours.

Ugr <19. 20/40/55° beam. Cob leds with cri>80 or cri>90 from 17 w up to 39w. Cob leds with cri> 90, designed for the fashion market or for art exhibitions, are available too. CASAMBI Dali driver for home automation control of lighting on request.

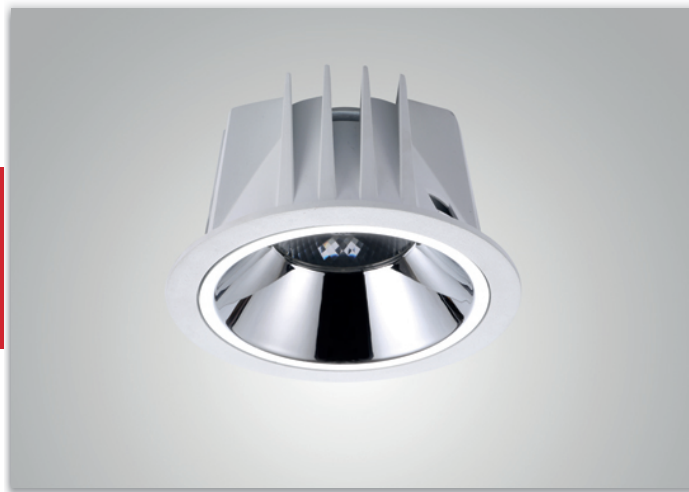

□ IP20 RG1 CE

DATA SHEET

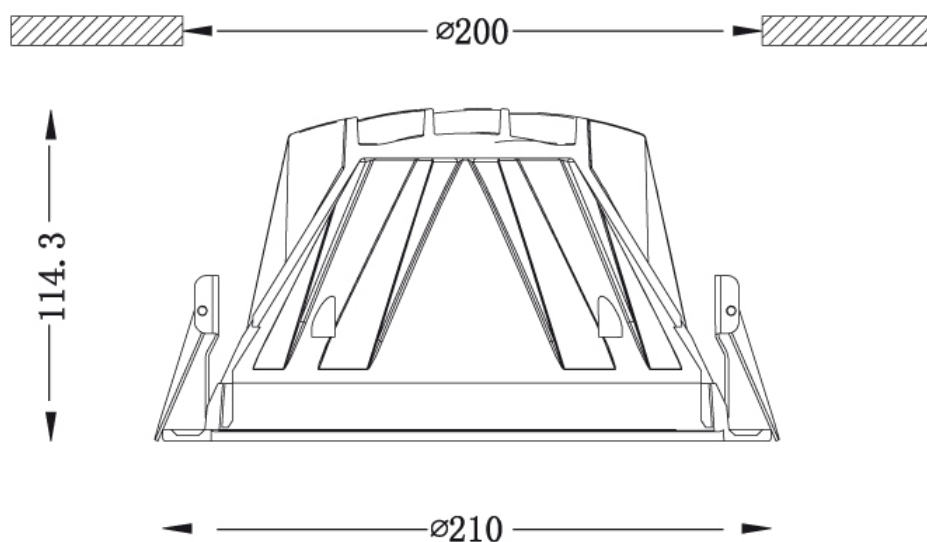

CHARACTERISTICS

LED modules: Latest generation COB Led. Other configurations available on request.

CRI >90 A+ ART

W	K	lm	mA	CRI
17	3000	1820	500	98
25	3000	2475	700	98
39	3000	3540	1050	98

DIORITE 210 -en- RECESSED LUMINAIRES O 141

CRI >90 A+ FASHION

W	K	lm	mA	CRI
17	3250	1925	500	>90
25	3250	2620	700	>90
39	3250	3750	1050	>90

CRI >90 A+

W	K	lm	mA	CRI
17	2700	2045	500	>90
17	3000	2095	500	>90
17	4000	2240	500	>90
25	2700	2775	700	>90
25	3000	2845	700	>90
25	4000	3050	700	>90
39	2700	3970	1050	>90
39	3000	4070	1050	>90
39	4000	4360	1050	>90

CRI >80 A++

W	K	lm	mA	CRI
17	2700	2410	500	>80
17	3000	2470	500	>80
17	4000	2575	500	>80
25	2700	3275	700	>80
25	3000	3360	700	>80
25	4000	3500	700	>80
39	2700	4680	1050	>80
39	3000	4810	1050	>80
39	4000	5010	1050	>80

DIORITE 210 -en- RECESSED LUMINAIRES ○ 141

NOTES AND ACCESSORIES

Honeycomb grid.
Compensation ring.
Box for concrete.
Emergency kit SA: 1 hour @350mA.
20°, 40°, 55° beam.
Availability of standard, dimmable, Dali dimmable and CASAMBI Dali driver.
Luminaires not suitable for covering with thermally insulating material.

Last update: 14 December 2018