


DIORITE SQUARE 210 -en- RECESSED LUMINAIRES Ø 142

Recessed downlight. Die-cast aluminium body, polycarbonate lens diffuser. Body and ring white color + glossy chrome reflector. Interchangeable reflectors to obtain different shades of light. 20/40/55 ° beam. Dimensions 210x210mm, hole 196x196mm, height 103mm. Led from 17w to 39w. Availability of LED CRI> 90 and fashion and art LED with CRI>98. Ugr <19.



□ IP20 RG1 CE

DATA SHEET

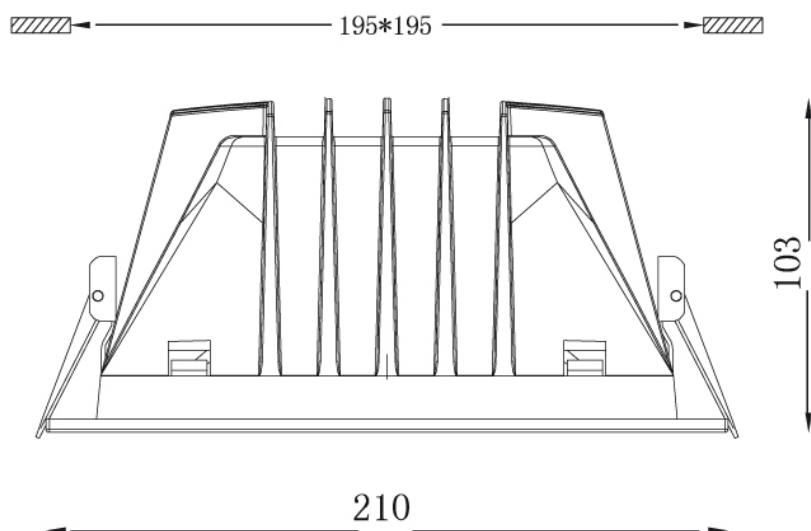

CHARACTERISTICS

LED modules: Latest generation COB Led. Other configurations available on request.

CRI >90 A+ ART

W	K	lm	mA	CRI
17	3000	1820	500	98
25	3000	2475	700	98
39	3000	3540	1050	98

DIORITE SQUARE 210 -en- RECESSED LUMINAIRES Ø 142

CRI >90 A+ FASHION

W	K	lm	mA	CRI
17	3250	1925	500	>90
25	3250	2620	700	>90
39	3250	3750	1050	>90

CRI >90 A+

W	K	lm	mA	CRI
17	2700	2045	500	>90
17	3000	2095	500	>90
17	4000	2240	500	>90
25	2700	2775	700	>90
25	3000	2845	700	>90
25	4000	3050	700	>90
39	2700	3970	1050	>90
39	3000	4070	1050	>90
39	4000	4360	1050	>90

CRI >80 A++

W	K	lm	mA	CRI
17	2700	2410	500	>80
17	3000	2470	500	>80
17	4000	2575	500	>80
25	2700	3275	700	>80
25	3000	3360	700	>80
25	4000	3500	700	>80
39	2700	4680	1050	>80
39	3000	4810	1050	>80
39	4000	5010	1050	>80

DIORITE SQUARE 210 -en- RECESSED LUMINAIRES Ø 142

NOTES AND ACCESSORIES

Compensation frame.
Emergency kit Sa. 1x350 mA
20°, 40° or 55° beam.
Availability of standard, dimmable, Dali dimmable and CASAMBI Dali driver.
Luminaires not suitable for covering with thermally insulating material.

Last update: 14 December 2018