

ORION 100 -en- LIGHTING SYSTEMS O O23

INDEPENDENT FLOOD LIGHT FOR TRACK SYSTEMS

Innovative product that combines design aspects and high-level performances. The innovation of this product consists of the driver concealed in the track, making the classic driver box superfluous. Cob led with cri> 80 from 17w up to 31w, fluxes from 2675lm 2700k up to 4850lm 4000k. Cob leds with cri> 90, designed for the fashion market or for art exhibitions, are available too.

Orion has a die-cast aluminium body, polycarbonate lens or aluminium reflector 60 ° diffuser, 3 circuits universal adapter. As for the accessories there are: opal diffuser and honeycomb grid. Device size: d.100x219mm, maximum encumbrance 219mm




IP20

RG1




DATA SHEET

Driver Standard / CASAMBI

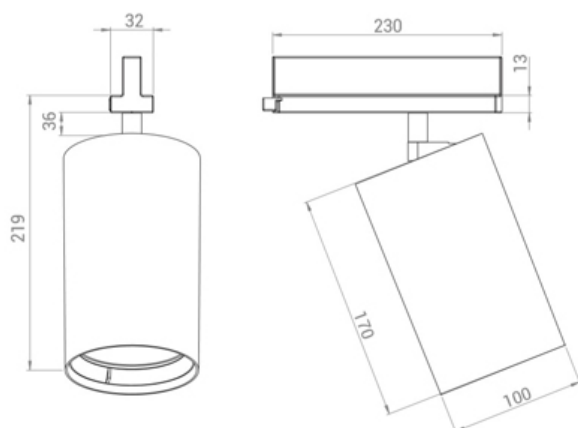

Driver Dali

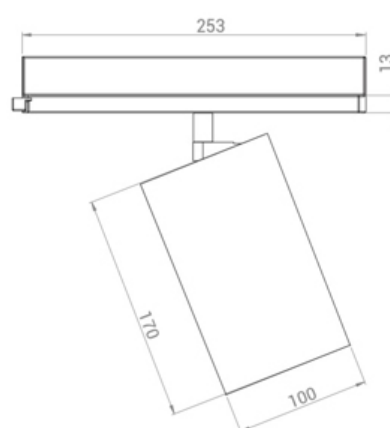

CHARACTERISTICS

LED modules: Latest generation COB Led. Other configurations available on request.

CRI >90 A+ ART

W	K	lm	mA	CRI
17	3000	1820	500	98
25	3000	2480	700	98
29	3000	2790	800	98
31	3000	3100	850	98

ORION 100 -en- LIGHTING SYSTEMS O O23

CRI >90 A+ FASHION

W	K	lm	mA	CRI
17	3250	1930	500	>90
25	3250	2620	700	>90
29	3250	2950	800	>90
31	3250	3560	850	>90

CRI >90 A+

W	K	lm	mA	CRI
17	2700	2050	500	>90
17	3000	2100	500	>90
17	4000	2240	500	>90
25	2700	2780	700	>90
25	3000	2850	700	>90
25	4000	3050	700	>90
29	2700	3130	800	>90
29	3000	3210	800	>90
29	4000	3440	800	>90
31	2700	3470	850	>90
31	3000	3570	850	>90
31	4000	3830	850	>90

ORION 100 -en- LIGHTING SYSTEMS O O23

CRI >80 A++

W	K	lm	mA	CRI
17	2700	2410	500	>80
17	3000	2470	500	>80
17	4000	2580	500	>80
25	2700	3280	700	>80
25	3000	3360	700	>80
25	4000	3500	700	>80
29	2700	3690	800	>80
29	3000	3790	800	>80
29	4000	3950	800	>80
31	2700	4100	850	>80
31	3000	4190	850	>80
31	4000	4370	850	>80

NOTES AND ACCESSORIES

Opal diffuser.
Honeycomb grid.
Beam: 60° reflector or 12°, 24°, 38° lens.
Standard driver included, Dali dimmable and CASAMBI Dali driver on request.

Last update: 16 October 2018