

ORION 55-188 -en- LIGHTING SYSTEMS O O25

INDEPENDENT FLOOD LIGHT FOR TRACK SYSTEMS

Innovative product that combines design aspects and high-level performances. The innovation of this product consists of the driver concealed in the track, making the classic driver box superfluous. Cob led with cri> 80 from 12w up to 18w, fluxes from 1580lm 2700k up to 2315lm 4000k. Cob leds with cri> 90, designed for the fashion market or for art exhibitions, are available too.

Orion has a die-cast aluminium body, polycarbonate lens or aluminium reflector 60 ° diffuser, 3 circuits universal adapter. As for the accessories there are: opal diffuser and honeycomb grid. Device size: d.55x135mm, maximum encumbrance 188mm




IP20

RG1




DATA SHEET


Driver Standard

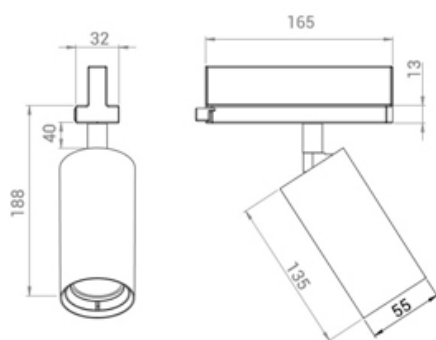

Driver CASAMBI



Driver Dali

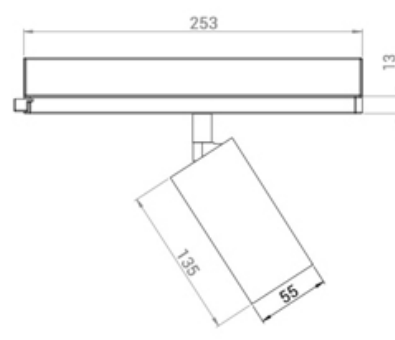

CHARACTERISTICS

LED modules: Latest generation COB Led. Other configurations available on request.

CRI >90 A+ ART

W	K	lm	mA	CRI
12	3000	1310	350	98
15	3000	1650	450	98

CRI >90 A+ FASHION

W	K	lm	mA	CRI
12	3250	1380	350	>90
15	3250	1740	450	>90

ORION 55-188 -en- LIGHTING SYSTEMS O O25

CRI >90 A+

W	K	lm	mA	CRI
12	2700	1220	350	>90
12	3000	1280	350	>90
12	4000	1350	350	>90
18	2700	1610	500	>90
18	3000	1690	500	>90
18	4000	1790	500	>90

CRI >80 A++

W	K	lm	mA	CRI
12	2700	1420	350	>80
12	3000	1500	350	>80
12	4000	1570	350	>80
18	2700	1890	500	>80
18	3000	1990	500	>80
18	4000	2090	500	>80

NOTES AND ACCESSORIES

Opal diffuser.
Honeycomb grid.
Beam: 60° reflector or 24°, 38° lens.
Standard driver included, Dali dimmable and CASAMBI Dali driver on request.

Last update: 16 October 2018